


RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	22.03.16	PROPOSAL		JULY

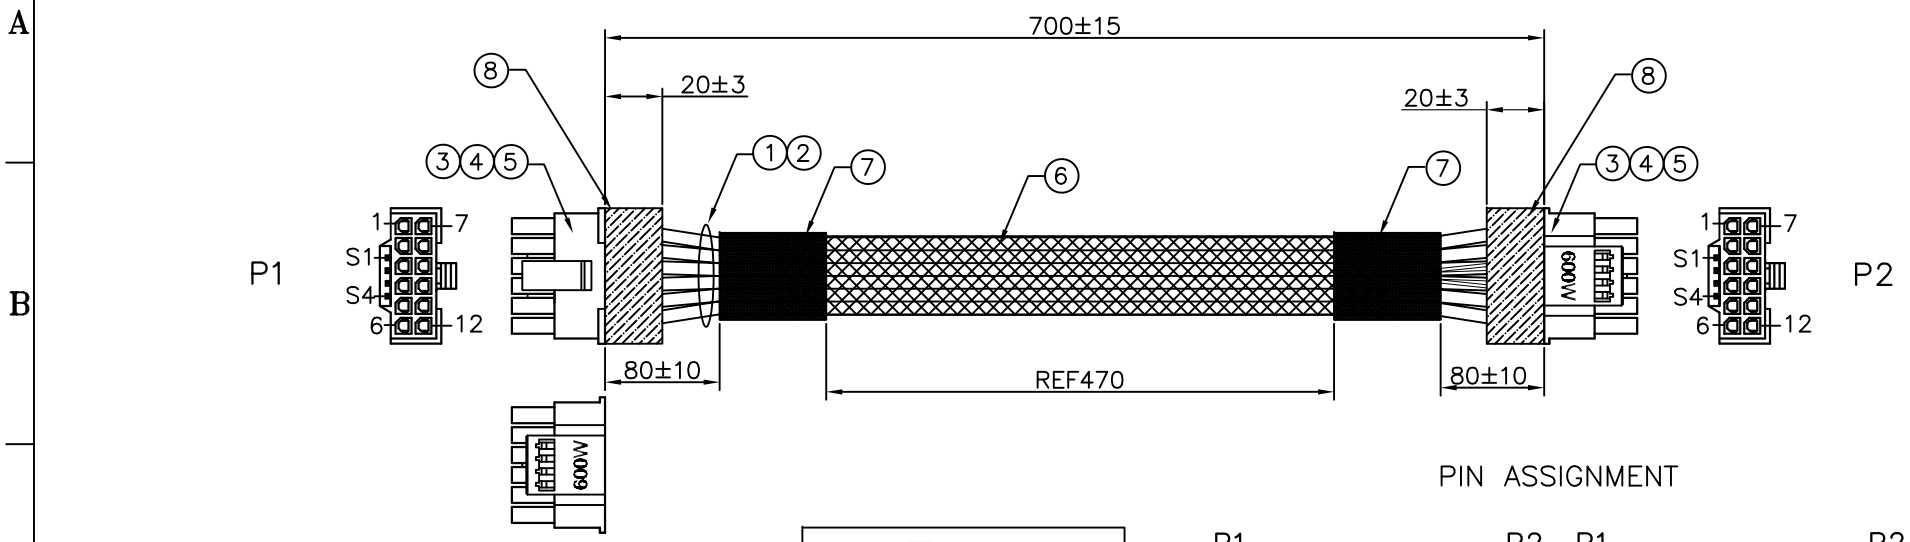


PIN ASSIGNMENT

P1		P2	P1	P2
1	16AWG	1	9	16AWG
2	16AWG	2	10	16AWG
3	16AWG	3	11	16AWG
4	16AWG	4	12	16AWG
5	16AWG	5	X1	28AWG
6	16AWG	6	X2	28AWG
7	16AWG	7	X3	28AWG
8	16AWG	8	X4	28AWG

NOTES:

- A. OPEN/SHORT/INTERMITTENCE: 100%.
- B. HI-POT: 300V DC/10ms
- C. INSULATION RESISTANCE: 10M OHM (MIN)
- D. CONDUCTIVE RESISTANCE: 3 OHM (MAX)
- E. RATING :12V/DC,PER WIRE: 9.2A(MAX)
- F. PRODUCTS COMPLY WITH RoHS STANDARDS.

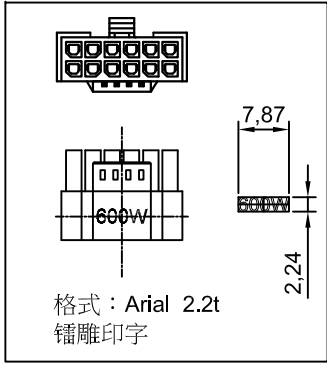

⑧	ACETATE TAPE	TAPE,W20*L18MM COLOR:BLACK	AR	CUST NO.:
⑦	HEAT TUBE	HEAT TUBE,φ18MM COLOR:BLACK	AR	
⑥	TUBE	BRAID,φ10MM COLOR:BLACK	AR	PART NO.: AB9003-3103-001-00
⑤	TERMINAL	PITCH:2.0,TIN PLATED	8	
④	TERMINAL	PITCH:3.0 FEMALE TERMIAL,TIN PLATED	24	TITLE: PH3.0 2*6P+PH2.0-4P TO PH3.0 2*6P +PH2.0-4P L=700mm 600W
③	CONNECTOR	PITCH:3.0 2*6P+PITCH:2.0 4P PLUG,COLOR:BLACK(WITH PRINTING:WHITE,600W)	2	<b>DRAWN BY</b> July(WSC) <b>DRAWING NO.</b> AB9003-3103-001-00
②	CABLE	UL10368 28AWG,COLOR:BLACK	AR	<b>CHECKED BY</b> HYPO <b>DRAWING SIZE</b> 1 : 1 A4
①	WIRE CABLE	UL1061 16AWG, PVC JACKET,COLOR:BLACK	AR	<b>APPROVED BY</b> JIM <b>UNIT</b> mm
NO.	ITEM	DESCRIPTION	QTY	<b>SORTING NO.</b> WSC <b>PAGE</b> 1 OF 1

