Customer Drawing

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	22.05.25	PROPOSAL		JULY

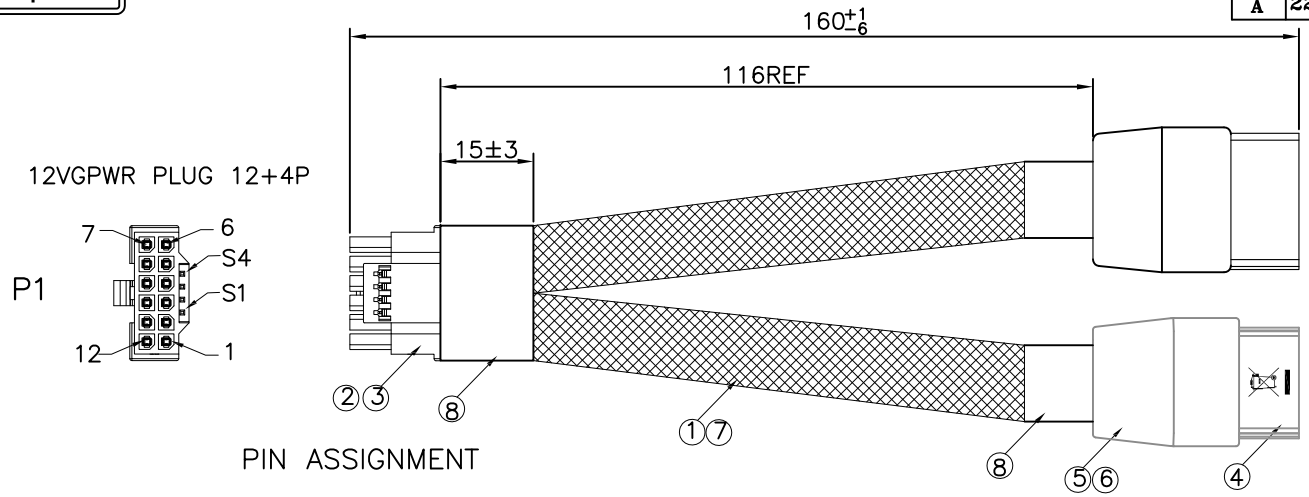

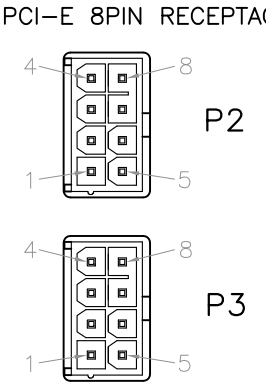

PIN ASSIGNMENT

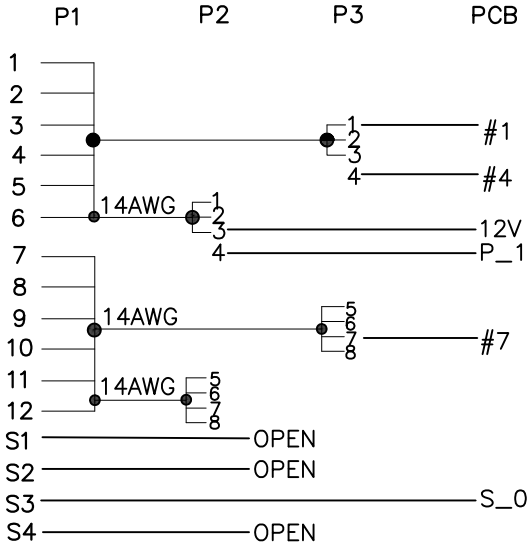

NOTES:

A. OPEN/SHORT/INTERMITTENCE: 100%.
B. HI-POT: 300V DC/10ms
C. INSULATION RESISTANCE: 10M OHM (MIN)
D. CONDUCTIVE RESISTANCE: 30mΩ (MAX)
E. RATING :12V/DC,PER WIRE: 9.2A(MAX)
F. PRODUCTS COMPLY WITH RoHS STANDARDS.
G. OPERATING TEMPERATURE:-25~105℃.
H. P1 WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET

NO.	ITEM	DESCRIPTION	QTY
⑧	ACETATE TAPE	ACETATE TAPE,ø15MM COLOR:BLACK	AR
⑦	TUBE	BRAID,ø4.0MM COLOR:BLACK	AR
⑥	MOLD	PVC 45A,BLACK	AR
⑤	INNER MOLD	MOLD,NATURE	8
④	TERMINAL	PITCH:4.2 2*4P 180° BLACK, TIN PLATED(WITH Pin7&8 Connection)	2
③	CONNECTOR	PITCH:2.0,TIN PLATED.	AR
②		PITCH:3.0 2*6P+PITCH:2.0 4P PLUG,COLOR:BLACK	AR
①	WIRE CABLE	UL3265 14AWG,28AWG,COLOR:BLACK	AR

CUST NO.:

WIESON TECHNOLOGIES CO., LTD

PART NO.: AB9003

TITLE: POWER CABLE 12VHPWR PLUG 12+4P TO 2*PCI-E 8PIN RECEPTACLE

DRAWN BY	July(WSC)	DRAWING NO.	AB9003
CHECKED BY	HYPO	DRAWING SIZE	1 : 1 A4
APPROVED BY	JIM	UNIT	mm
SORTING NO.	WSC	PAGE	1 OF 1

[ARTICLE:SR-83-32 V7]