

RoHS Compliant

B TO B CONN., PITCH: 0.5mm, H: 2.5mm, MALE,
SMT TYPE

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	13.04.23	PROPOSAL		Wzbin

ORDER INFORMATION

G2850-58 ** ** * *-00
① ② ③ ④

① PIN NUMBER:

05: 2*05PIN

06: 2*06PIN

...

30: 2*30PIN

② HOUSING MATERIAL&COLOR:

00: LCP, BLACK

01: LCP, NATURE

③ PACKING:

0: WITHOUT CAP/MYLAR;
TAPE&REEL

1: TAPE&REEL+CAP

2: TAPE&REEL+Mylar

④ TERMINAL PLATING:

1: GOLD FLASH

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION






TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: FULL Au OVER 50u" min. Ni
UNDERPLATE OVERALL

GROUNDING PIN: BRASS

GROUNDING PIN PLATING: Sn PLATED

PACKING: SEE ORDER INFORMATION

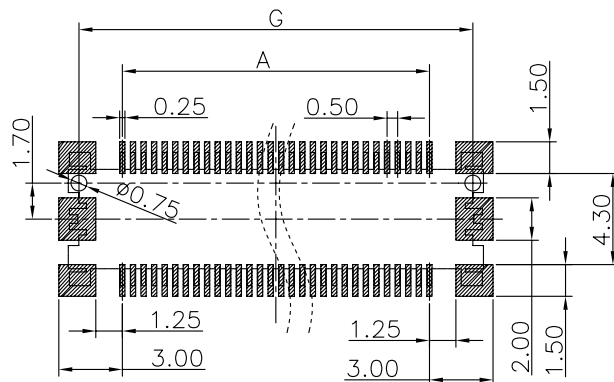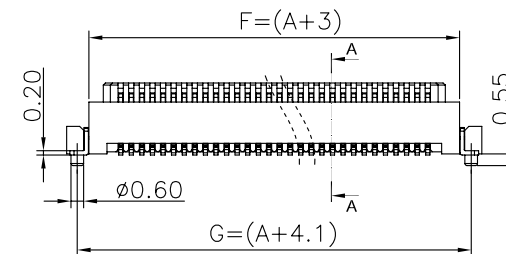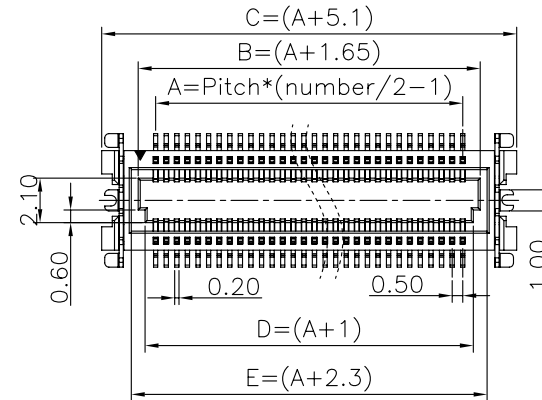

RECOMMENDED P.C.BOARD

- NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANARITY TOLERANCE Max: 0.10mm
3. GENERAL TOLERANCE: ± 0.20

—GENERAL —TOLERANCE — $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$ 	WIESON TECHNOLOGIES CO., LTD		PART NO.: G2850-58*****-00	
	DRAWN BY	Wzbin(WSC)	DRAWING NO.	G2850-58*****-00
	CHECKED BY	Wzbin	DRAWING SIZE	A4
	APPROVED BY	Jinkens	UNIT	mm
	SORTING NO.	CA0015(WSC)	PAGE	1 OF 1

