

RoHS Compliant

FOR REFERENCE ONLY

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	12.01.04	PROPOSAL		LXS

B TO B CONN., PITCH: 0.4mm, H: 1.45mm, FEMALE, SMT TYPE

ORDER INFORMATION

G4298-11 ** ** * * -00

① ② ③ ④

① PIN NUMBER:

05: 2*05PIN

06: 2*06PIN

...

40: 2*40PIN

② HOUSING MATERIAL&COLOR:

00: LCP, BLACK

01: LCP, NATURE

③ PACKING:

0: WITHOUT CAP/MYLAR;
TAPE&REEL

1: TAPE&REEL+CAP

2: TAPE&REEL+Mylar

④ TERMINAL PLATING:

1: GOLD FLASH

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION



TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: FULL Au OVER 50u" min. Ni
UNDERPLATE OVERALL

GROUNDING PIN: BRASS

GROUNDING PIN PLATING: Sn PLATED

PACKING: SEE ORDER INFORMATION

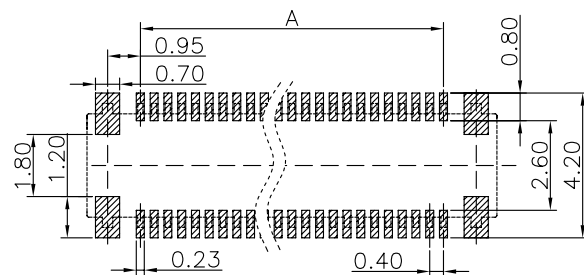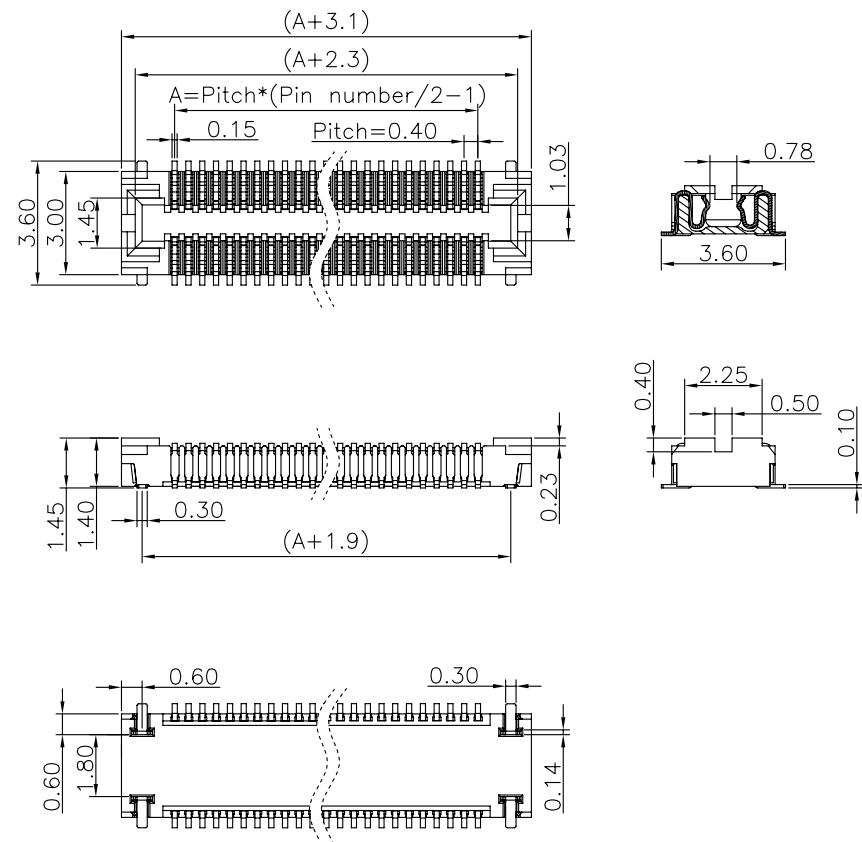

RECOMMENDED P.C.BOARD

- NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANARITY TOLERANCE Max: 0.10mm
3. GENERAL TOLERANCE: $\pm 0.20\text{mm}$

GENERAL TOLERANCE $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$		PART NO.: G4298-11*****-00	
		DRAWN BY	LXS(WSC)
		CHECKED BY	Wzbin
		APPROVED BY	JinKens
	SORTING NO.	CA0015(WSC)	PAGE
			1 OF 1

REFERENCE

[ARTICLE:044033 V6]