

RoHS Compliant

PHITCH=0.40mm B TO B H=1.00 FEMALE CONN.,.

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	14.01.07	PROPOSAL		LRP

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: SELECTIVE Au OVER 30u" min Ni
UNDER PLATED OVERALL

GROUNDING PIN: PHOSPHOR BRONZE

GROUNDING PIN PLATING: Sn PLATED

PACKING: REEL

ORDER INFORMATION
G4298-12 ** ** *-00

PIN NUMBER

24: 24P

30: 30P

40: 40P

50: 50P

60: 60P

70: 70P

TERMINAL PLATING

01: GOLD FLASH

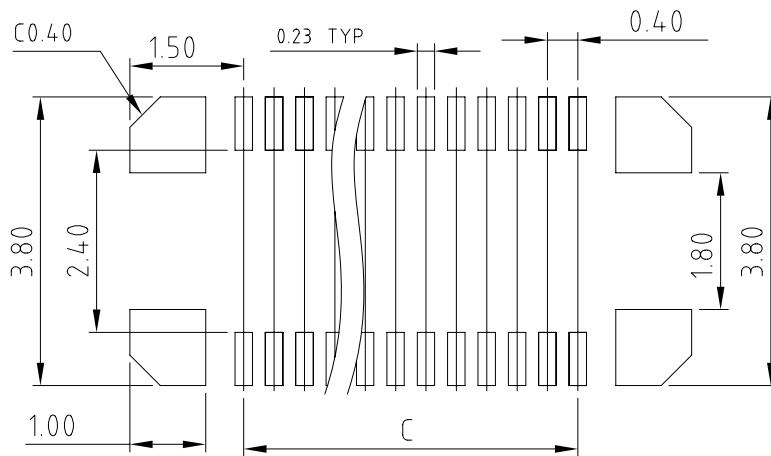
02: 3u" Au

03: 5u" Au

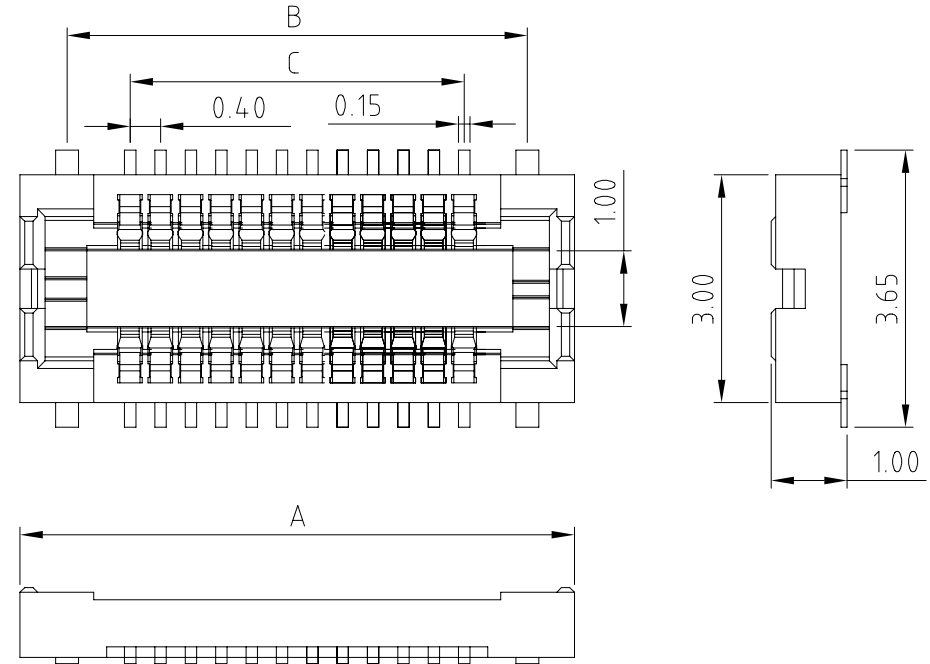
HOUSING MATERIAL

&COLOR


00: LCP; BLACK



RECOMMENDED P.C.BOARD

NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANRITY TOLERANCE MAX: 0.10mm

POS.	A	B	C
24	7.30	6.06	4.40
30	8.50	7.26	5.60
40	10.50	9.26	7.60
50	12.50	11.26	9.60
60	14.50	13.26	11.60
70	16.50	15.26	13.60

GENERAL
TOLERANCE
 $\pm 0.25\text{mm}$
GENERAL ANGLE
TOLERANCE
 $\pm 3^\circ$ 

WIESON TECHNOLOGIES CO., LTD

DRAWN BY

LRP(WSC)

CHECKED BY

JINKENS

APPROVED BY

JINKENS

SORTING NO.

CA0205(WSC)

PART NO.:

G4298-12*****-00

DRAWING NO.

G4298-12*****-00

DRAWING SIZE

A4

UNIT

mm

PAGE

1 OF 1

PROPOSAL

[ARTICLE:044033 V6]

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	14.01.07	PROPOSAL		LRP

PAGE	1 OF 1
------	--------

[ARTICLE:044033 V6]