

RoHS Compliant

B TO B CONN., PITCH: 0.4mm, H: 1.14mm, FEMALE,
SMT TYPE,34PIN

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	12.08.22	PROPOSAL		LFW

MATERIAL:

HOUSING: LCP (UL94V-0)

HOUSING COLOR: BLACK

TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: GOLD FLASH OVER 50u" min. Ni

MYLAR: PI

UNDERPLATED OVERALL

ORDER INFORMATION

G4298-15 ** ** * *-00

① ② ③ ④

① PIN NUMBER:

05: 2*05PIN

06: 2*06PIN

...

40: 2*40PIN

② HOUSING MATERIAL&COLOR:

00: LCP, BLACK

01: LCP, NATURE

③ PACKING:


0: WITHOUT CAP/MYLAR;
TAPE&REEL

1: TAPE&REEL+CAP


2: TAPE&REEL+Mylar

④ TERMINAL PLATING:


1: GOLD FLASH

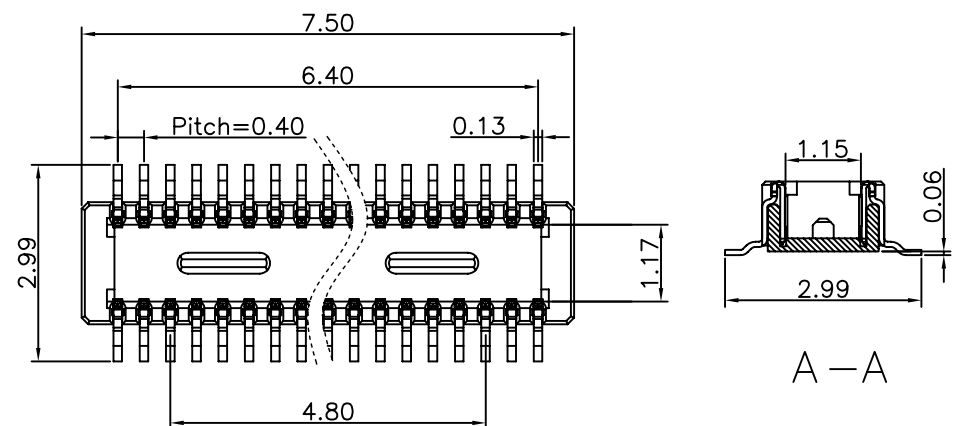

A-A

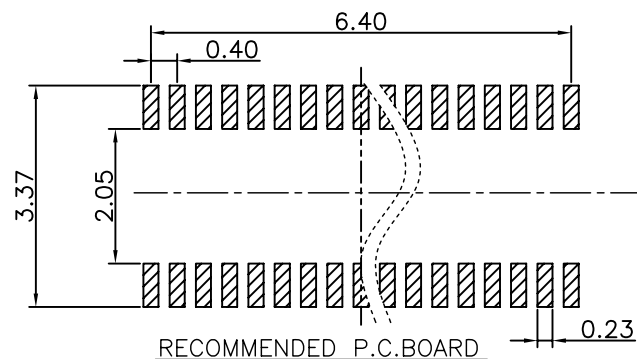

RECOMMENDED P.C.BOARD

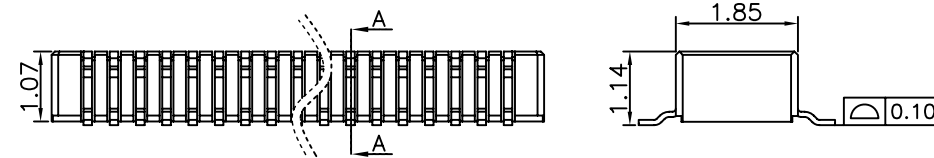

- NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANARITY TOLERANCE Max: 0.10mm
3. GENERAL TOLERANCE: $\pm 0.20\text{mm}$
4. EACH ONE CONTACT AT 4 CORNERS SHALL BE USED AS METAL HOLD DOWN

— GENERAL TOLERANCE — $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$	WIESON TECHNOLOGIES CO., LTD		PART NO.: G4298-15150001-00	
	DRAWN BY	LFW(WSC)	DRAWING NO.	G4298-15150001-00
	CHECKED BY	JINKENS	DRAWING SIZE	A4
	APPROVED BY	JINKENS	UNIT	mm
	SORTING NO.	CA0015(WSC)	PAGE	1 OF 1

PROPOSAL

[ARTICLE:044033 V6]