


REV	DATE	DESCRIPTION	ECN NO.	NAME
A	19.01.09	PROPOSAL		JULY
A1	19.06.05	ADD PACKAGE		JULY
B	19.06.08	NEW RELEASE		JULY

RoHS Compliant

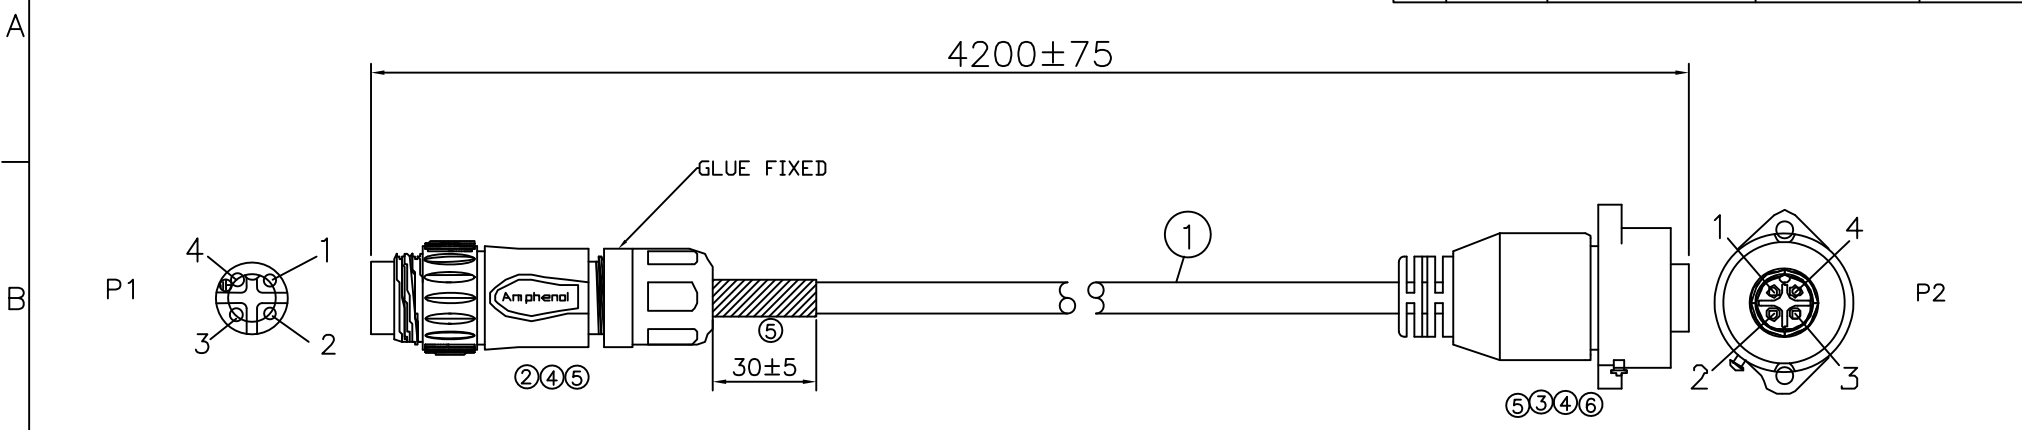


A
B
C
D
E

NOTES:

- 1.TEST CONDITION:
A. CABLE MUST TO BE 100% TESTED OPEN,SHORT &MISWIRE.
- B. INSULATOR RESISTANCE:2M ohm MIN,DC 300V,1SEC
- C. CONTACT RESISTANCE:2.0ohm MAX.
- 2.ALL MATERIALS MUST BE COMPLIANT TO RoHS STANDARD.
- 3.P2 MOLD NUMBER (INNER&OUTSIDE):MLCC-OT-2339, MLCC-OT-2340.
- 4.P2 H.S.T ON WIRE BEFORE MOLDING.
- 5.RELEASE THE SPECIFICATIONBASE ON THE PROPOSAL DRAWING REVISION A1 AS CUSTOMER APPROVAL.

PIN ASSIGNMENT

P1		P2
1	BLACK 1	1
2	BLACK 2	2
3	BLACK 3	3
4	GREEN/YELLOW	4

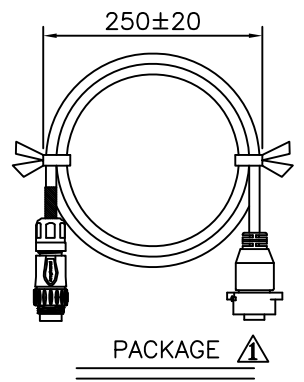

CUST NO.: 0442365
PART NO.: G9101JB277-008

⑥	WIESON		45P GRAY PVC,UL94-V0.	RA	WIESON TECHNOLOGIES CO., LTD			
⑤	WIESON		BLACK H.S.TUBE.	RA	TITLE:			
④	WIESON	GTS-24000002-00	TERMINAL 1.5MM ² ,L:7*2.0*1.7,P/N:KST:EN1507.	8	WATERPROOF CABLE			
③	AMPHENOL	C01620G00310012	CONNECT 4P AMPHENOL (ELBATECH CONSIGN)	1	DRAWN BY	JULY(WSC)	DRAWING NO.	G9101JB277-008
②	AMPHENOL	C01620H00310010	CONNECT 4P AMPHENOL(ELBATECH CONSIGN)	1	CHECKED BY	TON	DRAWING SIZE	A4
①	COPARTNER	2733813	UL 2733 16AWG*5C+FILLER+NON-WOVEN,PVC JACKET,GRAY,OD:9.2mm.	1	APPROVED BY	TOLIN	UNIT	mm
NO.	MFG	PART NO.	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1