


RoHS Compliant




C1	19.07.25	CANCEL TUBE	△	JULY	REV	DATE	DESCRIPTION	ECN NO.	NAME
					A1	16.06.30	PROPOSAL		WAY
					B	16.08.15	NEW RELEASE		WAY
					B1	16.08.24	CHANGE REV.	△	WAY
					B2	16.09.20	CHANGE LENGTH.	△	WAY
					C	16.09.22	CHANGE LENGTH.	△	WAY

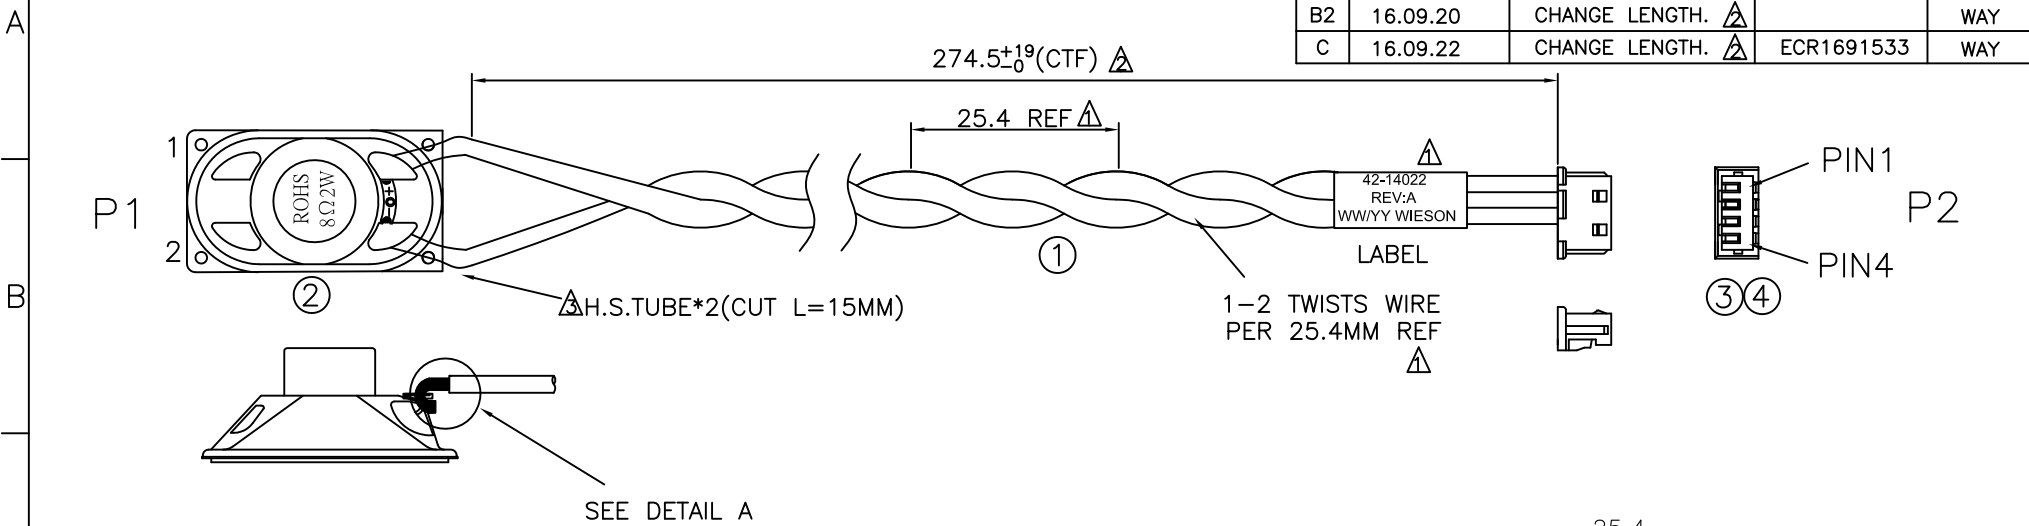

NOTES:

1. OPEN/SHORT TEST:100%
2. FOLLOW ALL MANUFACTURER'S ASSEMBLY INSTRUCTIONS AND ESD HANDLING PRACTICES.
3. TWIST WIRES TOGETHER, 1-2 TWISTS PER 25.4MM REF
4. RELEASE THE SPEC. BASE ON THE PROPOSAL DRAWING REVISION-B2 AS CUSTOMER APPROVAL.

PIN ASSIGNMENT

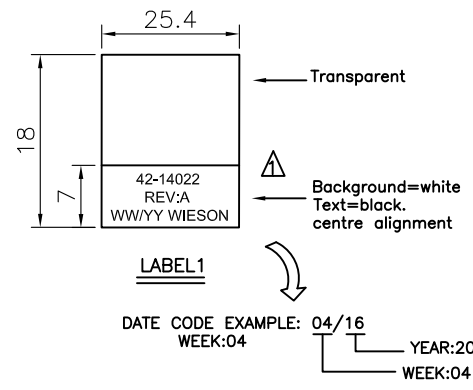

CUST NO.:  
42-14022/A △  
PART NO.:  
G9600HA004-036

WIESON TECHNOLOGIES CO., LTD  
TITLE:  
SPEAKER TO HSG 4P CABLE

④	TERMINAL	PH1.25mm TERMINAL, TIN PLATED, SEAGULL:KY-1251TPS-10 OR EQUIL.	2				
③	HOUSING	PH:1.25mm 4P HOUSING, SEAGULL:KY-1251HS-04 OR EQUIL.	1	DRAWN BY	WAY(WSC)	DRAWING NO.	G9600HA004-036
②	SPEAKER	71*41*26.7mm SPEAKER 8ohm 2W, R&Y P/N:SP4070-08-5C27-M5R	1	CHECKED BY	TON	DRAWING SIZE	A4
①	HOOK UP WIRE	UL1061 26AWG*1C PVC JACKET, OD:1.0MM, COLOR:SEE PIN ASSIGNMENT	2	APPROVED BY	TOLIN	UNIT	mm
NO.	ITEM	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1