




RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	18.06.19	PROPOSAL		KNIGHT

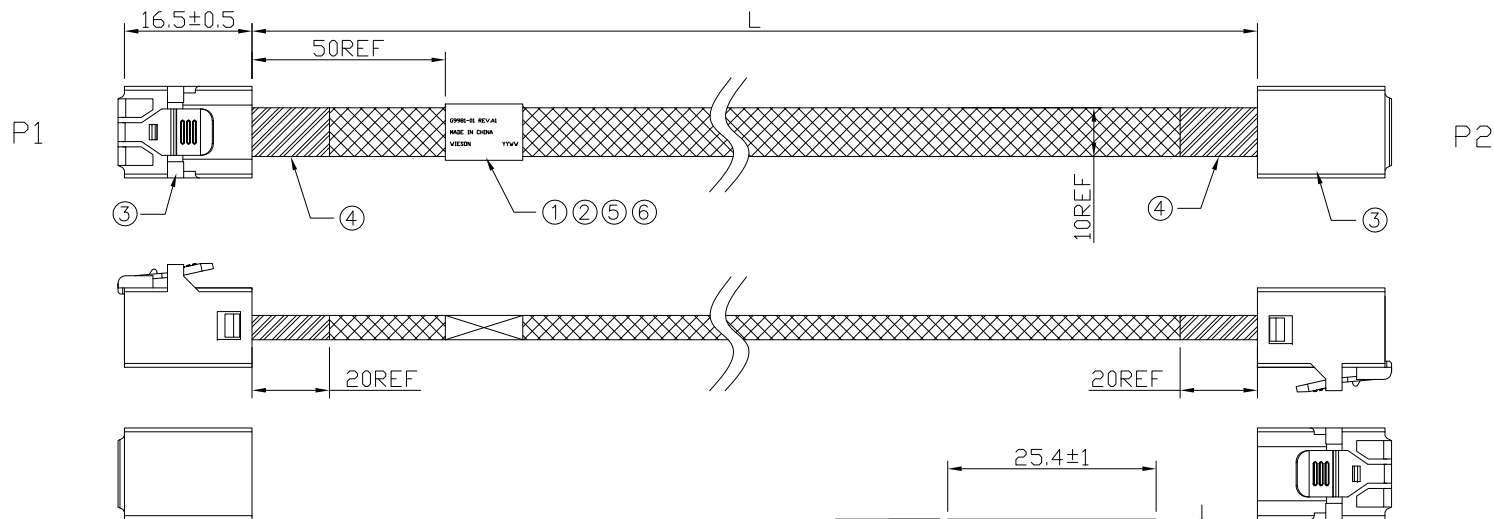

NOTES:

1. IMPEDANCE REQUIREMENT:
CABLE IMPEDANCE:100±10% OHMS.
2. OPERATING TEMPERATURE:0~80°C
3. THE INSERTION LOSS REQUIRE:SAS3.0 SPEC
4. FLAMMABILITY: CONNECTOR MEET UL 94V-0
5. THE CABLE ASSEMBLY SHOULD ROHS2 (2011/65/EU) COMPLIANT.

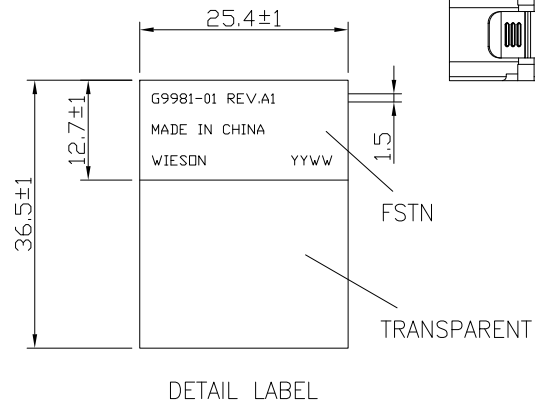

Mini SAS HD 4i
PIN ASSIGNMENT

CUST NO.:

PART NO.:
G9981-01

NO.	ITEM	DESCRIPTION	QTY	SORTING NO.	WCS	PAGE	1 OF 2
⑥	WOVEN TUBE	WOVEN TUBE ϕ 10	AR				
⑤	LABEL	LABEL: W25.4MM	1				
④	ACETATE TAPE	ACETATE TAPE W20MM	AR				
③	COVER	STR COVER, MATERIAL: PBT+15%GF	2				
②	CABLE	SIDE BAND, 30AWG	AR				
①	CABLE	SAS 30AWGx2C+2D+Shield	AR				

WIESON TECHNOLOGIES CO., LTD
WIESON


TITLE:
MINI SAS HD STR TO STR TYPE CABLE

DRAWN BY	KNIGHT	DRAWING NO.	G9981-01
CHECKED BY	VINCENT	DRAWING SIZE	1 : 1 A4
APPROVED BY	VINCENT	UNIT	mm
SORTING NO.	WCS	PAGE	1 OF 2

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A1	18.06.19	PROPOSAL		KNIGHT

WIRING TABLE

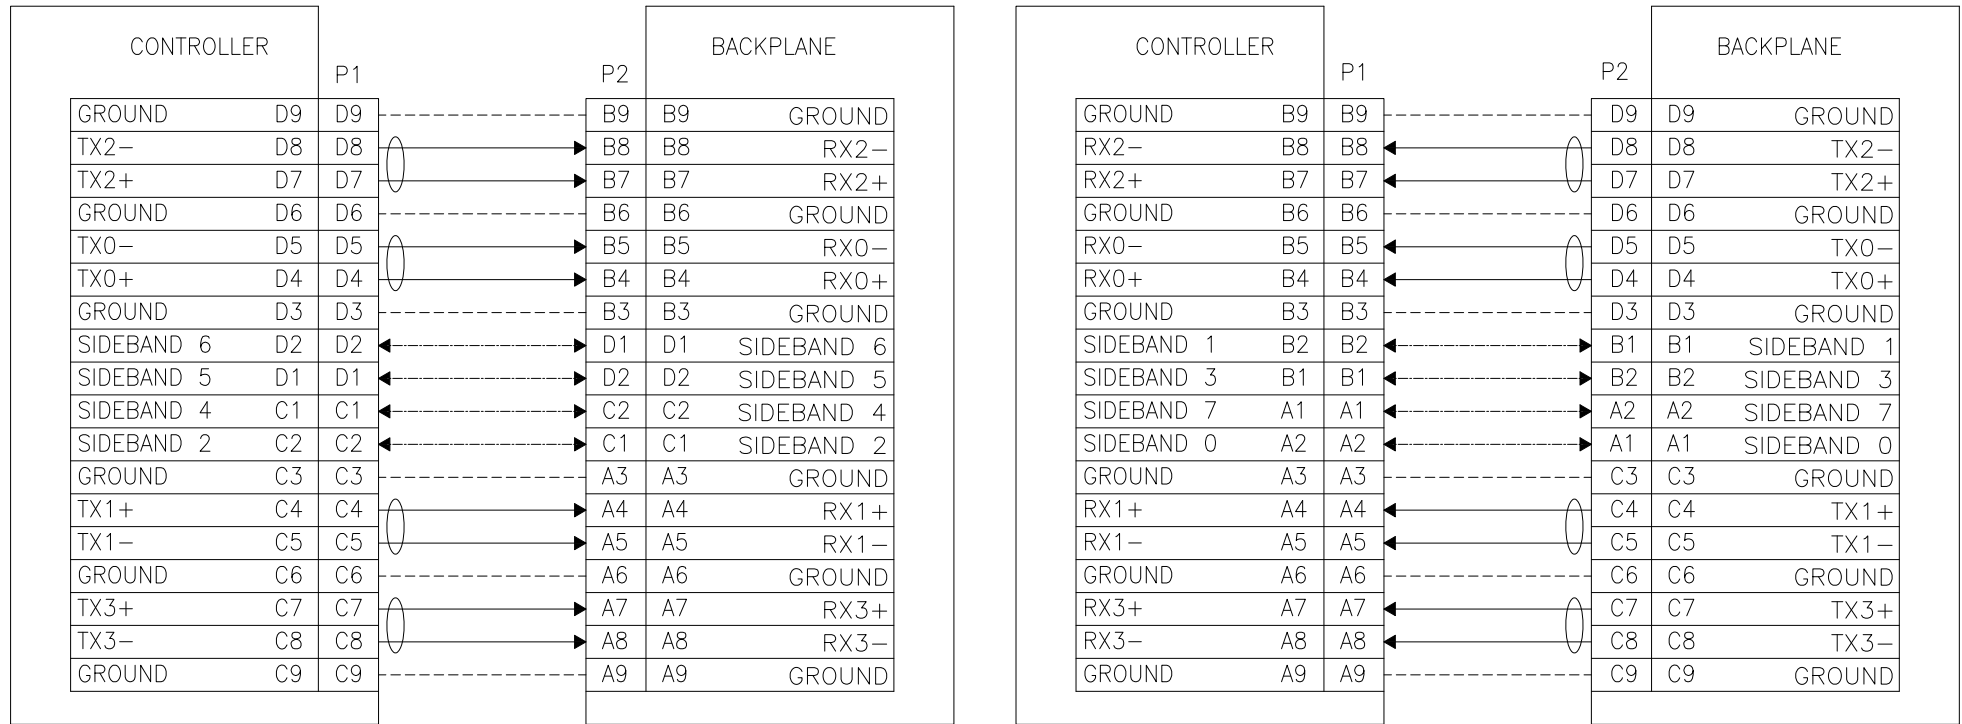

Legend :

- High-speed serial differential pairs
- Signal return
- Sideband signal

CUST NO.:

WIESON TECHNOLOGIES CO., LTD

PART NO.:
G9981-01

TITLE:
MINI SAS HD STR TO STR TYPE CABLE

DRAWN BY	KNIGHT	DRAWING NO.	G9981-01
CHECKED BY	VINCENT	DRAWING SIZE	1 : 1 A4
APPROVED BY	VINCENT	UNIT	mm
SORTING NO.	WSC	PAGE	2 OF 2