Customer Drawing

RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	18.12.19	PROPOSAL		JULY

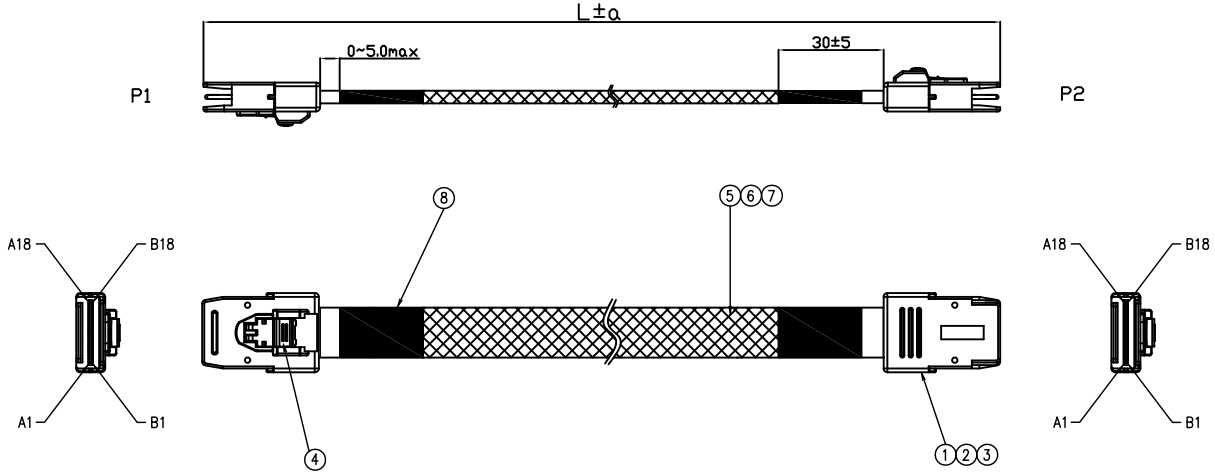

P1			P2	
GROUND	A1		B1	GROUND
Rx 0+	A2		B2	Tx 0+
Rx 0−	A3		B3	Tx 0−
GROUND	A4		B4	GROUND
Rx 1+	A5		B5	Tx 1+
Rx 1−	A6		B6	Tx 1−
GROUND	A7		B7	GROUND
SIDEBAND7	A8		B8	SIDEBAND7
SIDEBAND3	A9		B9	SIDEBAND3
SIDEBAND4	A10		B10	SIDEBAND4
SIDEBAND5	A11		B11	SIDEBAND5
GROUND	A12		B12	GROUND
Rx 2+	A13		B13	Tx 2+
Rx 2−	A14		B14	Tx 2−
GROUND	A15		B15	GROUND
Rx 3+	A16		B16	Tx 3+
Rx 3−	A17		B17	Tx 3−
GROUND	A18		B18	GROUND
GROUND	B1		A1	GROUND
Tx 0+	B2		A2	Rx 0+
Tx 0−	B3		A3	Rx 0−
GROUND	B4		A4	GROUND
Tx 1+	B5		A5	Rx 1+
Tx 1−	B6		A6	Rx 1−
GROUND	B7		A7	GROUND
SIDEBAND0	B8		A8	SIDEBAND0
SIDEBAND1	B9		A9	SIDEBAND1
SIDEBAND2	B10		A10	SIDEBAND2
SIDEBAND6	B11		A11	SIDEBAND6
GROUND	B12		A12	GROUND
Tx 2+	B13		A13	Rx 2+
Tx 2−	B14		A14	Rx 2−
GROUND	B15		A15	GROUND
Tx 3+	B16		A16	Rx 3+
Tx 3−	B17		A17	Rx 3−
GROUND	B18		A18	GROUND

NOTES:
1. IMPENDANCE REQUIREMENT:
   CABLE IMPEDANCE:100±10% OHMS.

NO.	ITEM	DESCRIPTION	QTY
⑧	ACETATE TAPE	ACETATE TAPE, W:30MM, COLOR: BLACK.	2
⑦	SLEEVE	PLASTIC BRAID SLEEVE, ø12	1
⑥	HIGH SPEED WIRE	HIGH SPEED WIRE	8
⑤	LOW SPEED ROUTE	LOW SPEED ROUTE (4PIN−SET)	2
④	LATCH	STAINLESS STEEL	2
③	HOUSING	EXTERNAL MOLD HOUSING, PBT, COLOR: BLACK.	2
②	HOUSING	INTERNAL MOLD HOUSING, PE, COLOR: NATURE.	2
①	CABLE	MINI SAS PCB, CONTACT AREA Au(30u") OVER NICKEL.	2

WIESON TECHNOLOGIES CO., LTD

PART NO.: G9981−15

TITLE: MINI SAS INTERNAL CABLE, 0.8PH 36P STRAIGHT TYPE

DRAWN BY	JULY	DRAWING NO.	G9981−15
CHECKED BY	TON	DRAWING SIZE	A4
APPROVED BY	TOLIN	UNIT	mm
SORTING NO.	WSC	PAGE	1 OF 1

[ARTICLE:044032 V6]