

RoHS Compliant

FOR REFERENCE ONLY

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	11.12.27	PROPOSAL		Wzbin

B TO B CONN., PITCH: 0.5mm, H: 0.9mm, FEMALE, SMT TYPE

ORDER INFORMATION
G4296-07 ** ** * * -00
① ② ③ ④




MATERIAL:
HOUSING: SEE ORDER INFORMATION (UL94V-0)
HOUSING COLOR: SEE ORDER INFORMATION
TERMINAL: BRASS
TERMINAL PLATING: FULL Au OVER 50u" min. Ni UNDERPLATE OVERALL
GROUNDING PIN: BRASS
GROUNDING PIN PLATING: Sn PLATED
PACKING: SEE ORDER INFORMATION

① PIN NUMBER:
05: 2*05PIN
06: 2*06PIN
...
40: 2*40PIN



② HOUSING MATERIAL&COLOR:
00: LCP, BLACK
01: LCP, NATURE
02: PA46, BLACK
03: PA46, NATURE

③ PACKING:
0: WITHOUT CAP/MYLAR;
TAPE&REEL
1: TAPE&REEL+CAP
2: TAPE&REEL+Mylar

④ TERMINAL PLATING:
1: GOLD FLASH

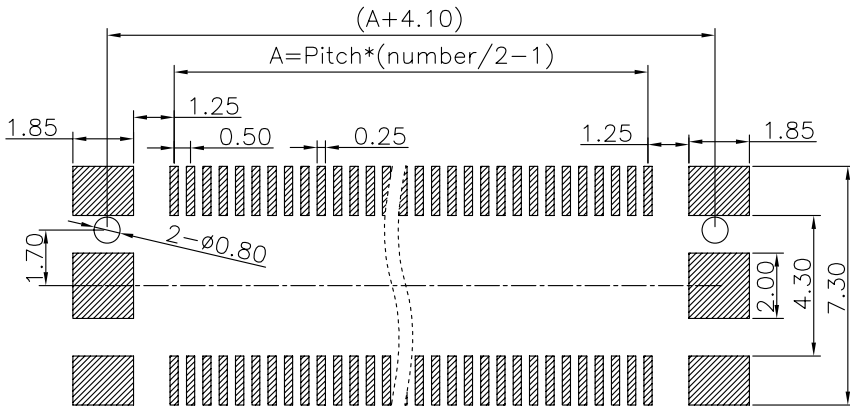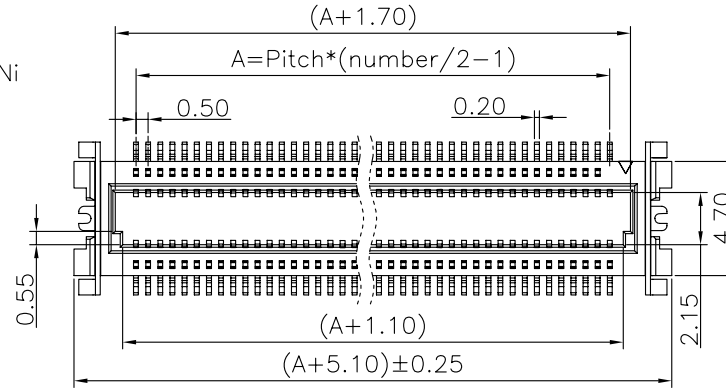

RECOMMENDED P.C.BOARD

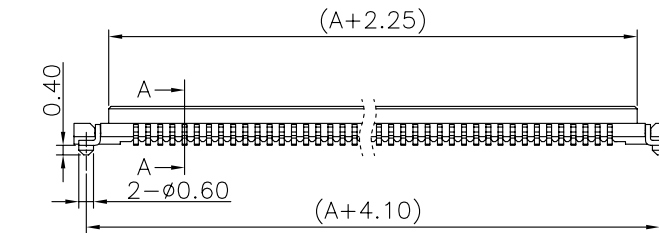

NOTE: 1. P.C.B LAYOUT TOLERANCE: ±0.05mm
2. SMT COPLANARITY TOLERANCE Max: 0.10mm
3. GENERAL TOLERANCE: ±0.20

GENERAL TOLERANCE ±0.25mm GENERAL ANGLE TOLERANCE ±3°	WIESON TECHNOLOGIES CO., LTD	PART NO.: G4296-07*****-00	
	DRAWN BY	Wzbin(WSC)	DRAWING NO. G4296-07*****-00
	CHECKED BY	Wzbin	DRAWING SIZE A4
	APPROVED BY	JinKens	UNIT mm
	SORTING NO. CA0015(WSC)	PAGE	1 OF 1

REFERENCE

[ARTICLE:044033 V6]