


RoHS Compliant

REV	DATE	DESCRIPTION	ECN NO.	NAME
A3	19.05.14	CHANGE SPEC		JULY
B	19.06.08	NEW RELEASE		JULY
A	19.01.09	PROPOSAL		JULY
A1	19.03.11	ADD PACKAGE&CHANGE CABLE		JULY
A2	19.03.15	CHANGE CABLE		JULY

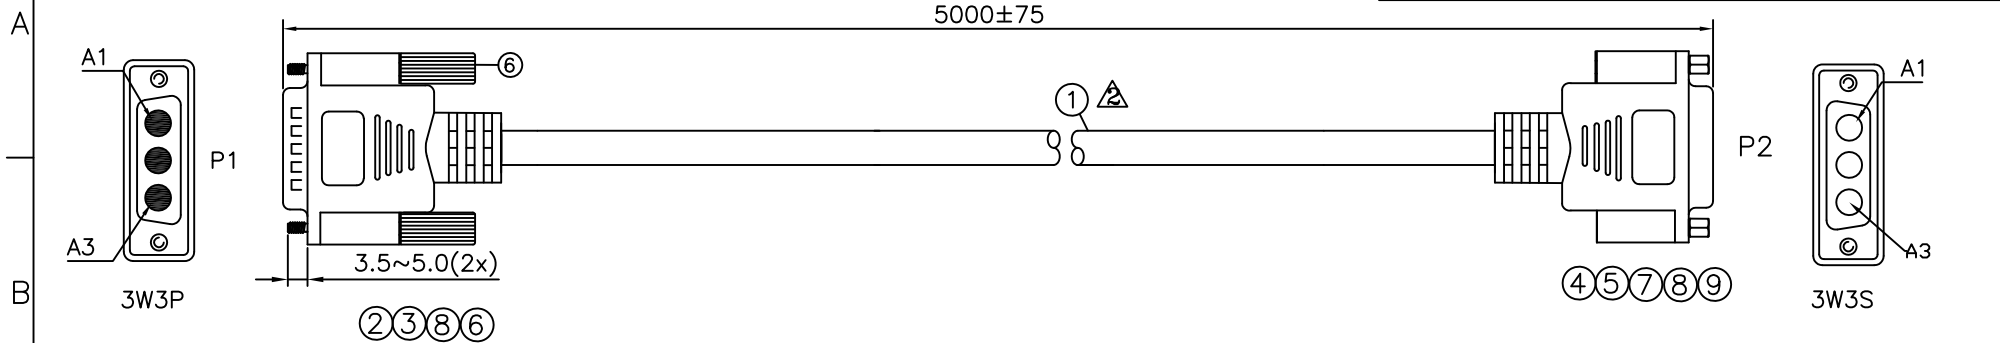


NOTES:

- TEST CONDITION:
 - A. CABLE MUST TO BE 100% TESTED OPEN, SHORT & MISWIRE.
 - B. INSULATOR RESISTANCE:DC 300V 0.01sec, 2Mohm MIN
 - C. CONTACT RESISTANCE: 2ohm MAX
- P1&P2 MOLD NUMBER:MLCC-DB-2335/2336.
P1SCREW MOLD NUMBER:MCSW00-5W-0087.
- WELDING WIRE TERMINALS TO WEAR H.S.G, BEFORE MOLDING.
- LEAD FREE SOLODER,THE INGREDIENT Sn+Cu,FOR SOLDER WIRE SHIELD.
- SHIELD WITH FOIL BERORE MOLD;
- RELEASE THE SPECIFICATIONBASE ON THE PROPOSAL DRAWING REVISION A3 AS CUSTOMER APPROVAL.

PIN ASSIGNMENT

P1	A1	BLUE	A1
	A2	BROWN	A2
	A3	GREEN/YELLOW	A3
	SHELL	DRAIN	SHELL

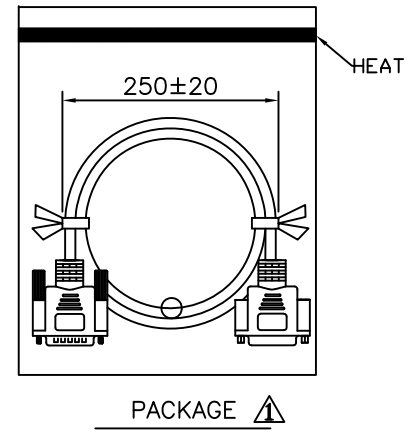

NO.	MFG	PART NO.	DESCRIPTION	QTY	SORTING NO.	WSC	PAGE	1 OF 1
⑨	WIESON	GSF6-A475180	4-40UNC,W4.75,NICKEL PLATED.	2				
⑧	WIESON		PVC, 45P, BALCK(BC01) UL94-V0	RA				
⑦	WIESON		4-40UNC,W4.75*5.0*L11.3,SCREW+SPRING WSHR.	2				
⑥	WIESON	GSC-040N32N	SCREW #4-40,NICKEL PLATED, MOLDING COLOR: BLACK(BC01).	2				
⑤	SIGNALORIGIN	XHY-01-0042-10	TERMINAL FEMALE, PIN GOLD PLATED, 14~16AWG(ELBATECH CONSIGN).	3				
④	SIGNALORIGIN	XHY-05-0820	D-SUB 3P FEMALE,SOLDER TYPE,BLACK PBT INSULATOR(ELBATECH CONSIGN).	1				
③	SIGNALORIGIN	XHY-01-0041-10	TERMINAL MALE, PIN GOLD PLATED, 14~16AWG(ELBATECH CONSIGN).	3				
②	SIGNALORIGIN	XHY-05-0819	D-SUB 3P MALE,SOLDER TYPE,BLACK PBT INSULATOR(ELBATECH CONSIGN).	1				
①	COPARTNER	2725813	SJT 16AWG*3C+DRAIN+AL/MY, PVC JACKET, BLACK, OD9.3mm.	1				

CUST NO.: 0442465/B

PART NO.: G9836JB277-092

WIESON TECHNOLOGIES CO., LTD			
TITLE: DB 3PIN/M TO DB 3PIN/F			
DRAWN BY	JULY	DRAWING NO.	G9836JB277-092
CHECKED BY	TON	DRAWING SIZE	A4
APPROVED BY	TOLIN	UNIT	mm
SORTING NO.	WSC	PAGE	1 OF 1