

RoHS Compliant

PHITCH=0.50mm B TO B H=2.05 MALE CONN.,

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	14.02.28	PROPOSAL		LRP

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

TERMINAL: BRASS

TERMINAL PLATING: SELECTIVE Au OVER 30u" min Ni
UNDER PLATED OVERALL



GROUNDING PIN: BRASS

GROUNDING PIN PLATING: Sn PLATED

PACKING: REEL

ORDER INFORMATION
G2850-26 ** ** *-00PIN NUMBER
40: 2*40PTERMINAL PLATING
01: GOLD FLASH

02: 3u" Au

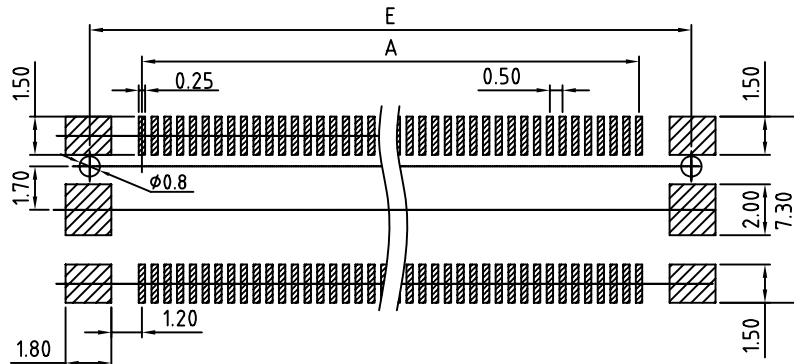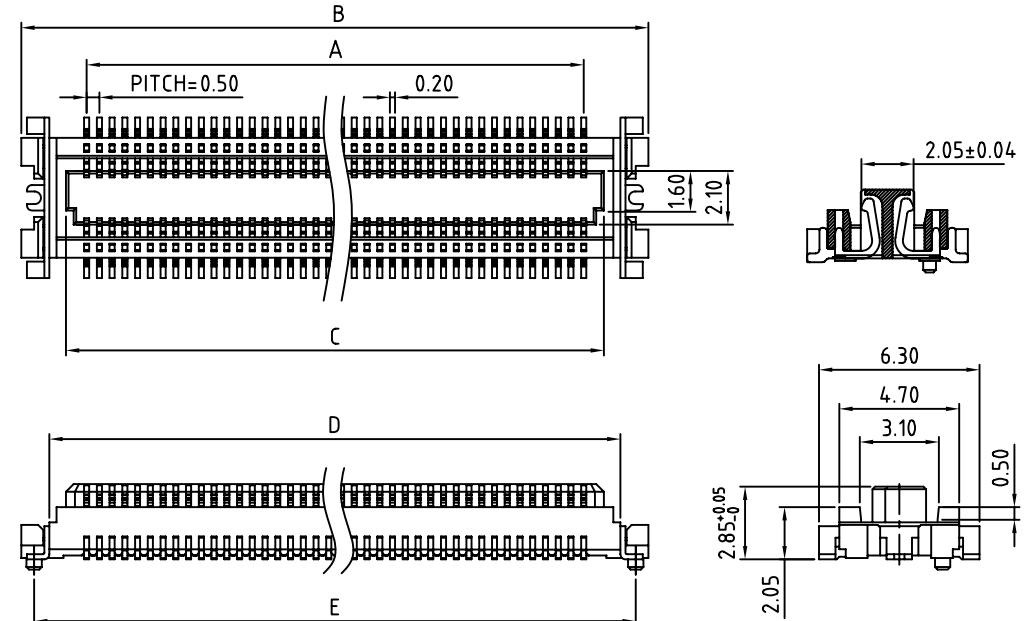03: 3u" Au OVER GOLD FLASH
UNDER PLATED OVERALLHOUSING MATERIAL
&COLOR
00: LCP; NATURAL

RECOMMENDED P.C. BOARD

- NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANRITY TOLERANCE MAX: 0.10mm

DIM

 $A = 0.5 * (\text{CONTACTS} / 2 - 1)$ $B = A + 5.1$ $C = A + 1.6$ $D = A + 2.9$ $E = A + 4.1$

GENERAL TOLERANCE $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$	WIESON TECHNOLOGIES CO., LTD		PART NO.: G2850-26*****-00	
	DRAWN BY	LRP(WSC)	DRAWING NO.	G2850-26*****-00
	CHECKED BY	JINKENS	DRAWING SIZE	A4
	APPROVED BY	JINKENS	UNIT	mm
	SORTING NO.	CA0205(WSC)	PAGE	1 OF 1

PROPOSAL

[ARTICLE:044033 V6]

RoHS Compliant

FOR REFERENCE ONLY

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	11.12.27	PROPOSAL		Wzbin

B TO B CONN., PITCH: 0.5mm, H: 0.9mm, FEMALE,
SMT TYPE

ORDER INFORMATION

G4296-07 ** ** * * -00
① ② ③ ④

① PIN NUMBER:

05: 2*05PIN

06: 2*06PIN

...

40: 2*40PIN

② HOUSING MATERIAL&COLOR:

00: LCP, BLACK

01: LCP, NATURE

02: PA46, BLACK

03: PA46, NATURE

③ PACKING:

0: WITHOUT CAP/MYLAR;
TAPE&REEL

1: TAPE&REEL+CAP

2: TAPE&REEL+Mylar

④ TERMINAL PLATING:

1: GOLD FLASH

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

TERMINAL: BRASS


TERMINAL PLATING: FULL Au OVER 50u" min. Ni

UNDERPLATE OVERALL

GROUNDING PIN: BRASS





GROUNDING PIN PLATING: Sn PLATED

PACKING: SEE ORDER INFORMATION

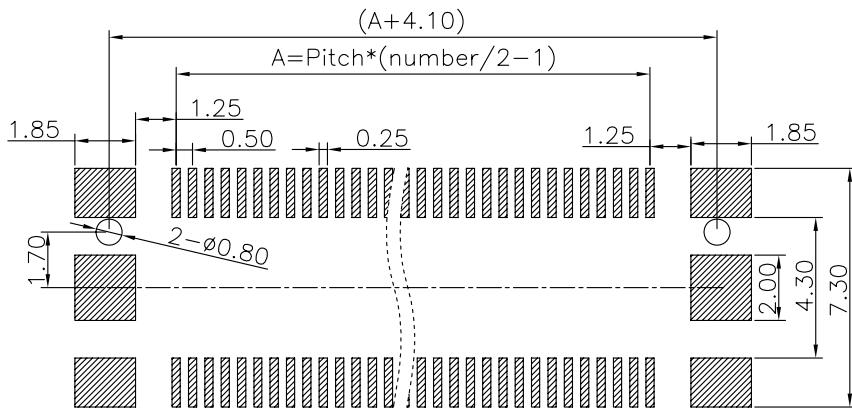

RECOMMENDED P.C.BOARD

NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANARITY TOLERANCE Max: 0.10mm
3. GENERAL TOLERANCE: ± 0.20

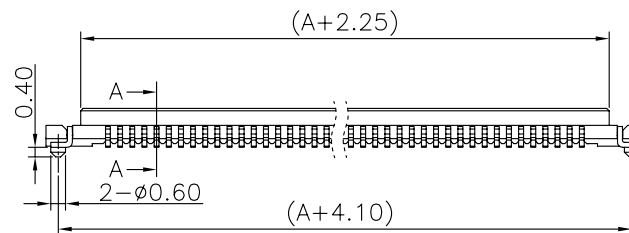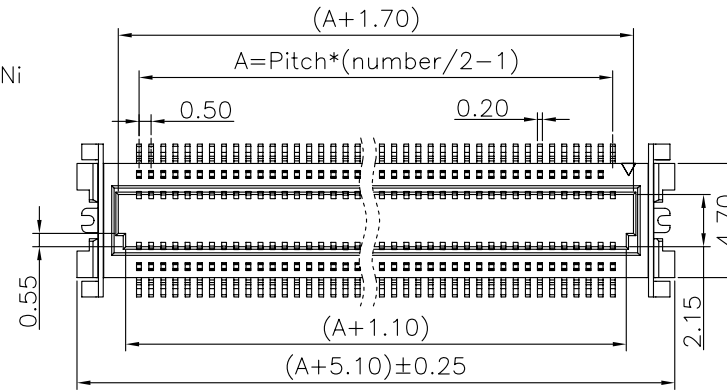

— GENERAL — TOLERANCE — $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$ 	WIESON TECHNOLOGIES CO., LTD		PART NO.: G4296-07*****-00	
	DRAWN BY	Wzbin(WSC)	DRAWING NO.	G4296-07*****-00
	CHECKED BY	Wzbin	DRAWING SIZE	A4
	APPROVED BY	JinKens	UNIT	mm
	SORTING NO.	CA0015(WSC)	PAGE	1 OF 1

REFERENCE

[ARTICLE:044033 V6]