

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	14.01.07	PROPOSAL		LRP

PAGE	1 OF 1
------	--------

RoHS Compliant

PHITCH=0.40mm B TO B H=0.86 FEMALE CONN.,.

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	14.01.07	PROPOSAL		LRP

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: SELECTIVE Au OVER 30u" min Ni
UNDER PLATED OVERALL

GROUNDING PIN: PHOSPHOR BRONZE

GROUNDING PIN PLATING: Sn PLATED

PACKING: REEL

ORDER INFORMATION
G4298-13 ** ** *-00

PIN NUMBER

24: 24P

30: 30P

40: 40P

60: 60P

HOUSING MATERIAL

&COLOR


00: LCP; BLACK

TERMINAL PLATING


01: GOLD FLASH

02: 3u" Au

03: 5u" Au

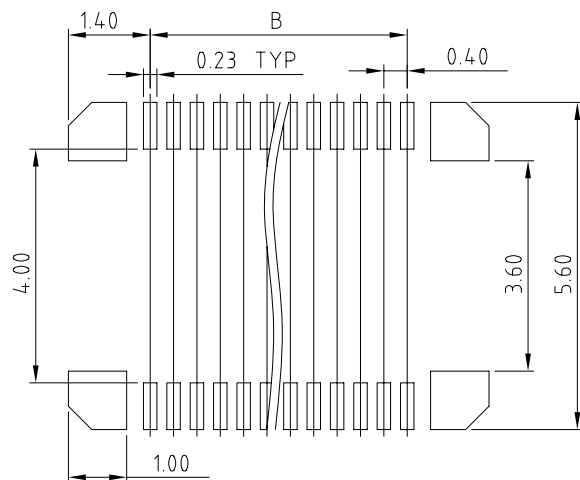

RECOMMENDED P.C.BOARD

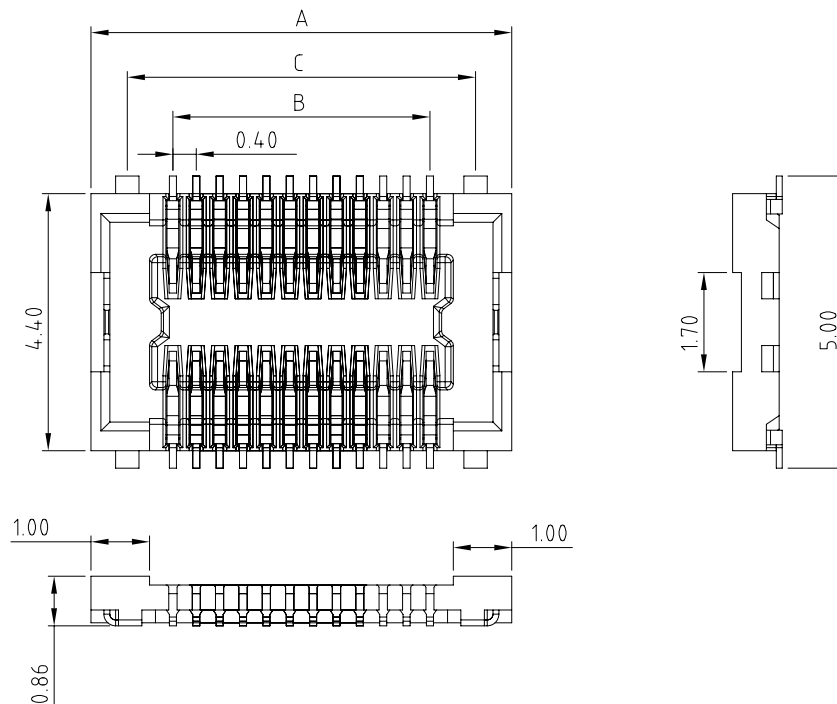NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. SMT COPLANRITY TOLERANCE MAX: 0.10mm

POS.	A	B	C							
24	7.20	4.40	5.96	GENERAL TOLERANCE ± 0.25mm GENERAL ANGLE TOLERANCE ± 3°  WIESON TECHNOLOGIES CO., LTD	PART NO.: G4298-13*****-00					
30	8.40	5.60	7.06		DRAWN BY	LRP(WSC)	DRAWING NO.	G4298-13*****-00		
40	10.40	7.60	9.06		CHECKED BY	JINKENS	DRAWING SIZE			
60	14.40	11.60	13.06		APPROVED BY	JINKENS	UNIT	mm		
					SORTING NO.	CA0205(WSC)	PAGE	1 OF 1		

PROPOSAL

[ARTICLE:044033 V6]