

RoHS Compliant

DVI-D CONNECTOR DIP TYPE

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	18.12.25	ISSUED		HHUAN

MATERIAL

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

TERMINAL: BRASS

TERMINAL PLATING: SELECTIVE IN CONTACT AREA,
100u" min. Sn IN SOLDER TAIL AREA, BOTH
OVER 30u" min. Ni UNDERPLATED OVERALL

SHELL: SPCC

SHELL PLATED: Ni PLATED

HARPOON : SPCC

HARPOON PLATING : Sn PLATED

MAX.PROCESSING TEMP: 230°C FOR 60SECONDS
260°C FOR 10SECONDS

ORDER INFORMATION

G3281-77 XX XX XX -XX

① ② ③

00: ROHS

H0: HALOGEN FREE

① HOUSING MATERIAL&COLOR

00: LCP; BEGIE

01: LCP; BLACK

② SCREW

00: WITHOUT SCREW

01: LOCK SCREW, H=4.80mm, H0=11.80mm

02: ATTACHED SCREW, H=4.80mm, H0=11.80mm

03: LOCK SCREW, H=5.80mm, H0=13.00mm

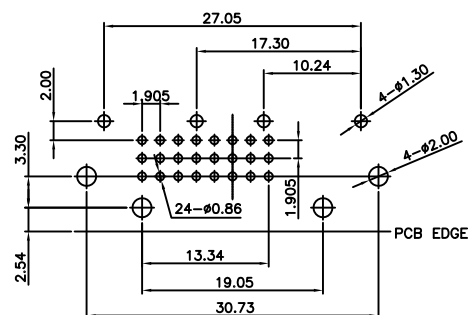

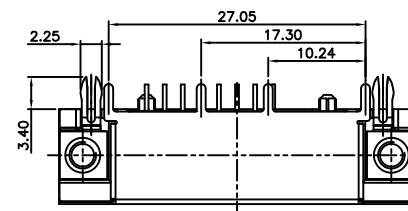
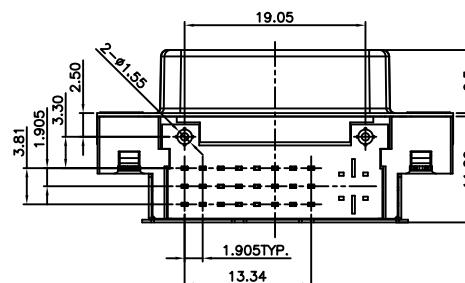

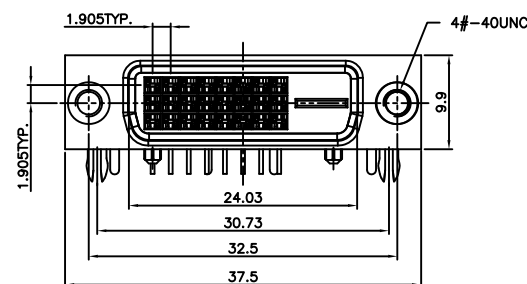
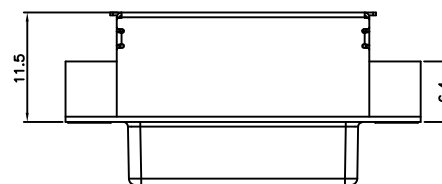
04: ATTACHED SCREW, H=5.80mm, H0=13.00mm

③ TERMINAL PLATING

01: GOLD FLASH

02: 15u" Au

03: 30u" Au

RECOMMENDED P.C. BOARD
HOLE LAYOUTNOTE: 1.P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$ GENERAL
TOLERANCE
 $\pm 0.25\text{mm}$
GENERAL ANGLE
TOLERANCE
 $\pm 3^\circ$ WIESON TECHNOLOGIES CO., LTD
DRAWN BY HHUAN(WSC)
CHECKED BY HHUAN
APPROVED BY KEN
SORTING NO. CA0009(WSC)PART NO.:
G3281-77XXXXXX-XX
DRAWING NO. G3281-77XXXXXX-XX
DRAWING SIZE A4
UNIT mm
PAGE 1 OF 1