

RoHS Compliant

G6136 FPC0.50mm PITCH CONNECTOR SMT TYPE

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	18.05.10	PROPOSAL		YSHUA

MATERIAL:

HOUSING: SEE ORDER INFORMATION (UL94V-0)

HOUSING COLOR: SEE ORDER INFORMATION

ACTUATOR: SEE ORDER INFORMATION (UL94V-0)

ACTUATOR COLOR: SEE ORDER INFORMATION

TERMINAL: PHOSPHOR BRONZE

TERMINAL PLATING: 80u" min. Sn OVER 30u" min.
Ni UNDERPLATE OVERALL

MOUNTING PEG: PHOSPHOR BRONZE

MOUNTIGN PEG PLATING: 80u" min. Sn OVER 30u" min.
Ni UNDERPLATE OVERALLORDER INFORMATION
G6136-35 ** * * ** -00

06: 06P

30: 30P

(Remark:

07P 09P

11P 13P


16P 17P

19P 21P

23P 25P







27P 28P

29P Without)

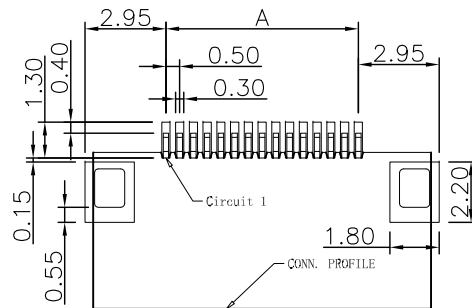HOUSING
MATERIAL&COLOR
0: LCP,NATUREPAACTUATOR
MATERIAL&COLOR
0: PA9T, BLACKPACKING OPTION
01: TUBE
02: TAPE&REEL

RECOMMENDED P.C.BOARD

- NOTE: 1. P.C.B LAYOUT TOLERANCE: $\pm 0.05\text{mm}$
2. COPLANARITY TOLERANCE Max: 0.10mm

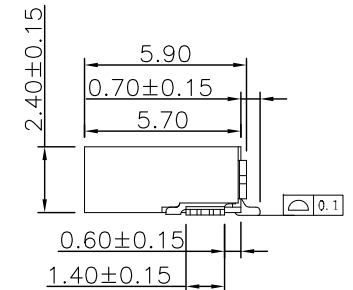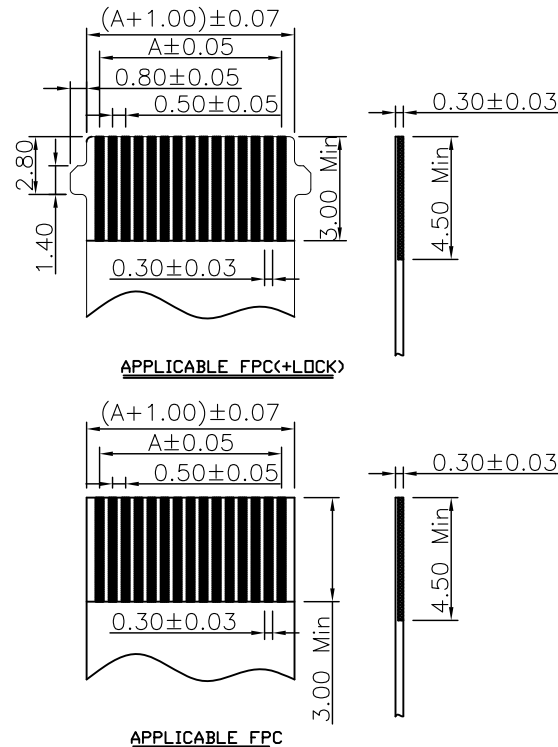

$$A = (\text{CONTACTS} - 1) \times 0.50\text{mm}$$
$$B = A + 1.06\text{mm}$$
$$C = A + 5.30\text{mm}$$

GENERAL TOLERANCE $\pm 0.25\text{mm}$ GENERAL ANGLE TOLERANCE $\pm 3^\circ$	WIESON TECHNOLOGIES CO., LTD		PART NO.: G6136-35*****-00	
	DRAWN BY	YSHUA(WSC)	DRAWING NO.	G6136-35*****-00
	CHECKED BY	JINKENS	DRAWING SIZE	A4
	APPROVED BY	JINKENS	UNIT	mm
	SORTING NO.	CA0384(WSC)	PAGE	1 OF 1

PROPOSAL

[ARTICLE:044033 V6]